



UAE

TASHEEL ROUNDABOUT, AL SAJAA INDUSTRIAL AREA, SHARJAH -UAE

+971566299377 | +971522297071

Web : www.perolini.co Email : sales@perolini.co

MAHENDRANAGAR CHOKDI, RAMESHWAR COMPLEX, MORBI-363642. (GUJ), INDIA.


+919446379696 | +919495339877

EXCLUSIVE I INNO-VATION

ABOUT US

Welcome to PEROLINI CERAMICS, where you can discover a selection of products and solutions to help you create an ideal living and enthralling work space. We started our journey since 1973. Today, we are a recognized name in the industry. It is our endeavor to deliver endless choice and enviable quality at endearing prices. We have developed an understanding of what customers want, through years of experience and we constantly strive to deliver it. Our customers are pampered with oodles of attention and spoilt for choice. This is because - Your satisfaction is our inspiration!

We leave no stone unturned as our premier products are manufactured with superior quality Ceramic raw materials ensuring ultimate tile strength, glaze and finishing.We are committed to supply the highest quality products and strive to surpass customer expectations. We understand the value of money and ensure that our customers feel completely content for what they spend at Perolini Ceramics in terms of cost and quality. We offer a host of constantly attempt to deliver products that keep up with the latest trends in the industry.

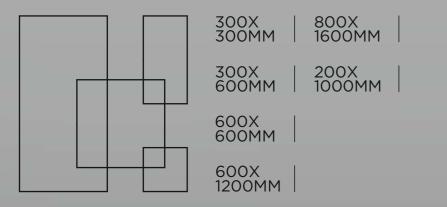





APPLICATIONS AREA

×.

SCRATCH RESISTANT










FINISH GLOSSY



1004 - L



1004 - HL



1004 - FL







FINISH GLOSSY




1005 - L



1005 - HL



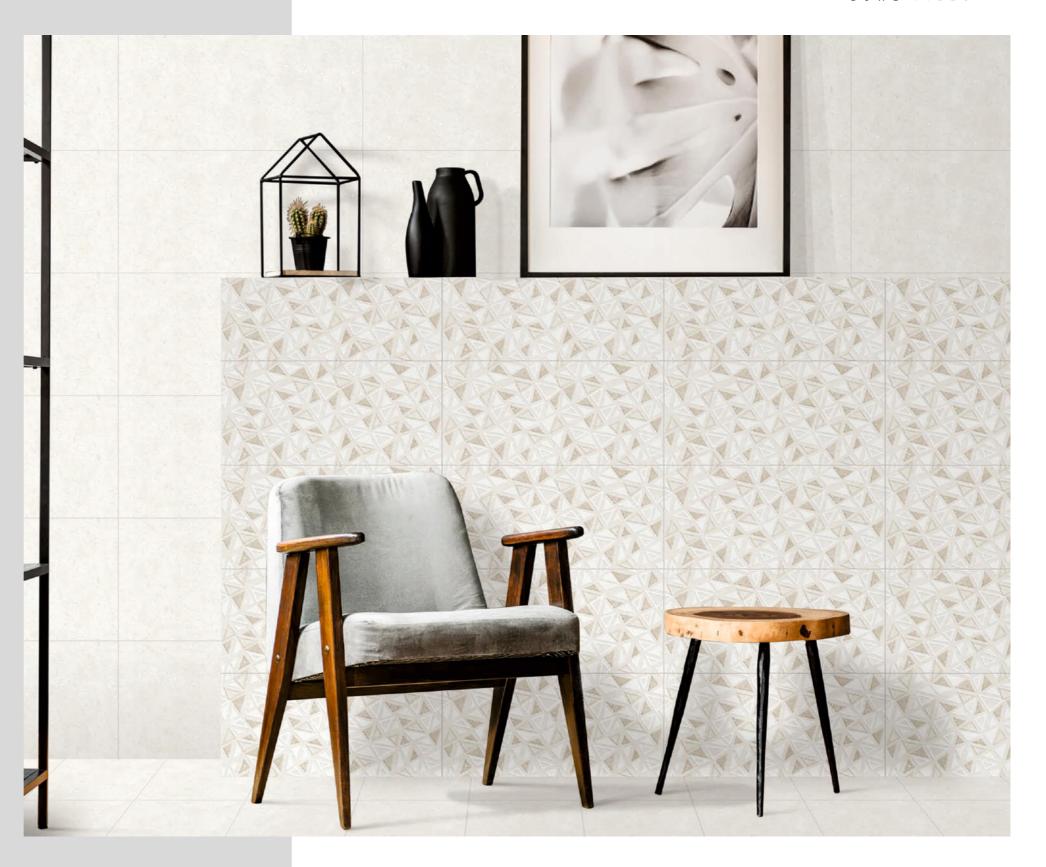





FINISH GLOSSY



1006 - L



1006 - HL









FINISH GLOSSY




1007 - L



1007 - HL



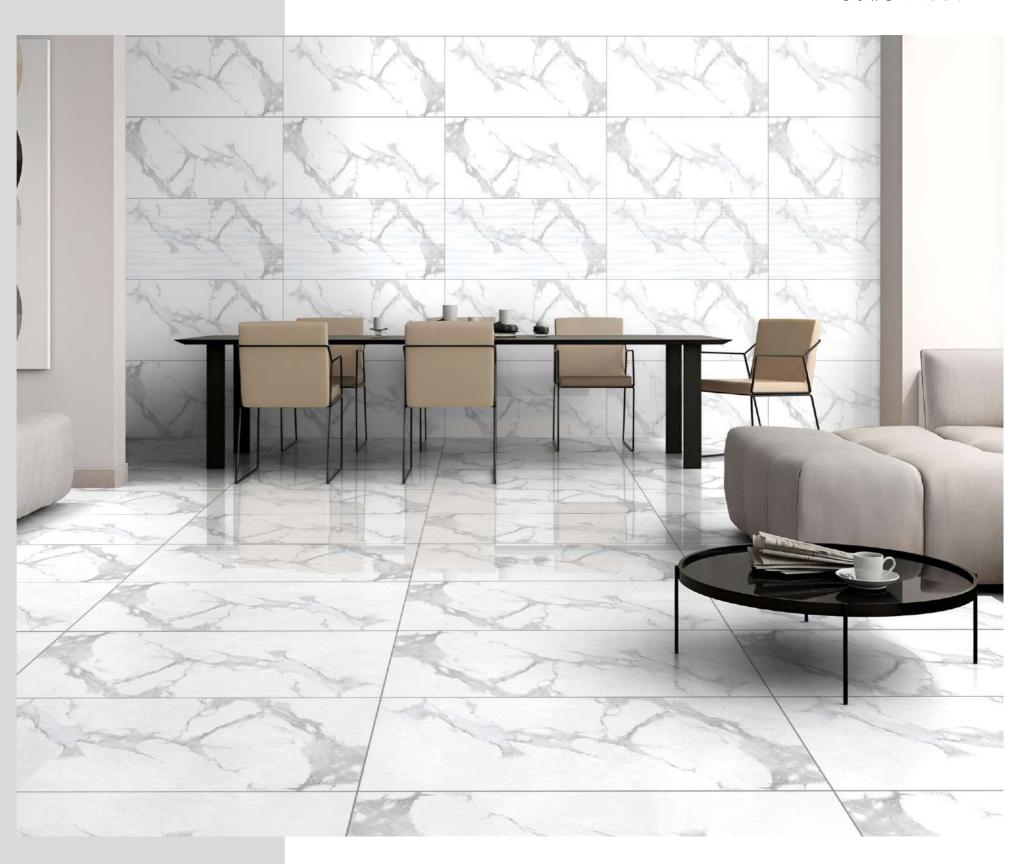





FINISH GLOSSY



1008 - KT



1008 - HL-1










FINISH GLOSSY



1008 - L



1008 - HL-2










FINISH GLOSSY



1011 - L

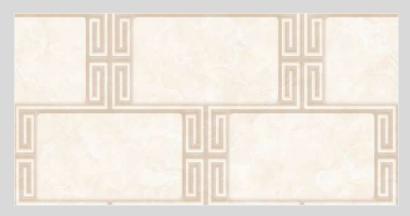

1011 - HL



TAR ...







FINISH GLOSSY










FINISH GLOSSY




1014 - L

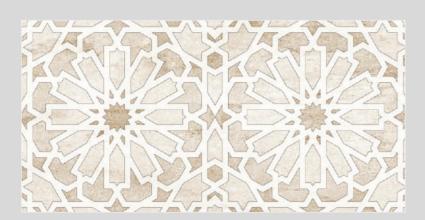

1014 - HL



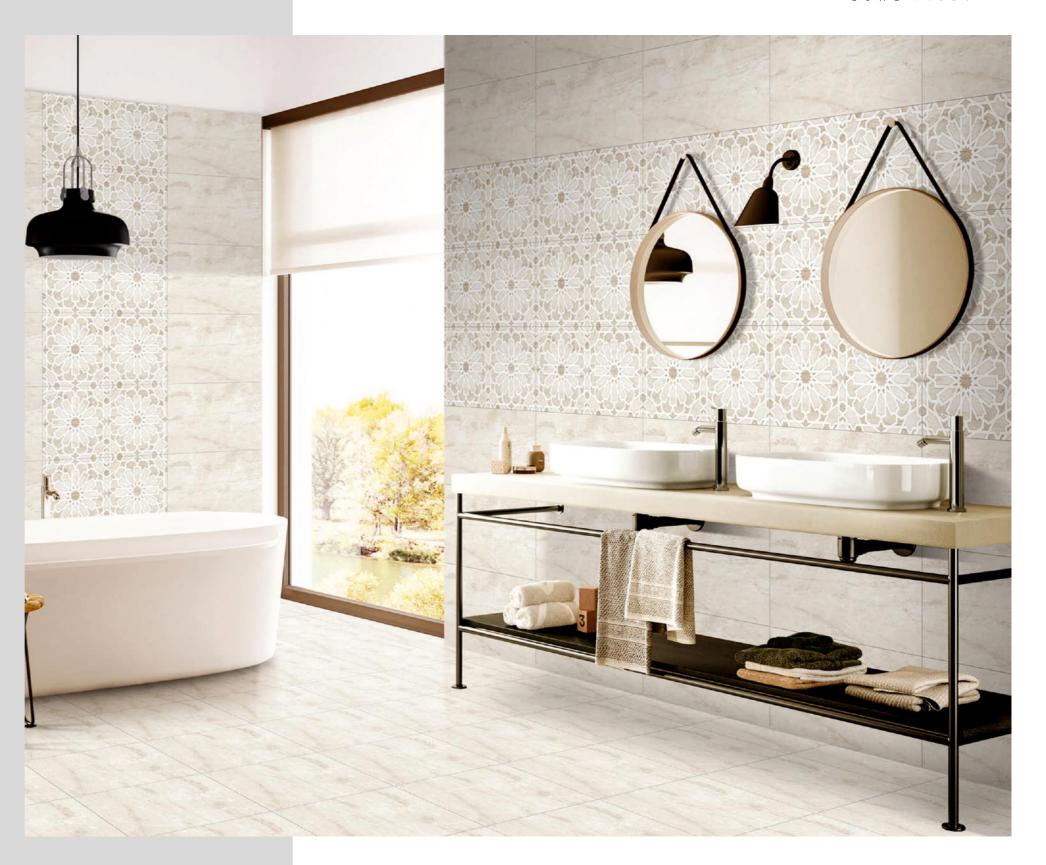





FINISH GLOSSY




1018 - L



1018 - HL



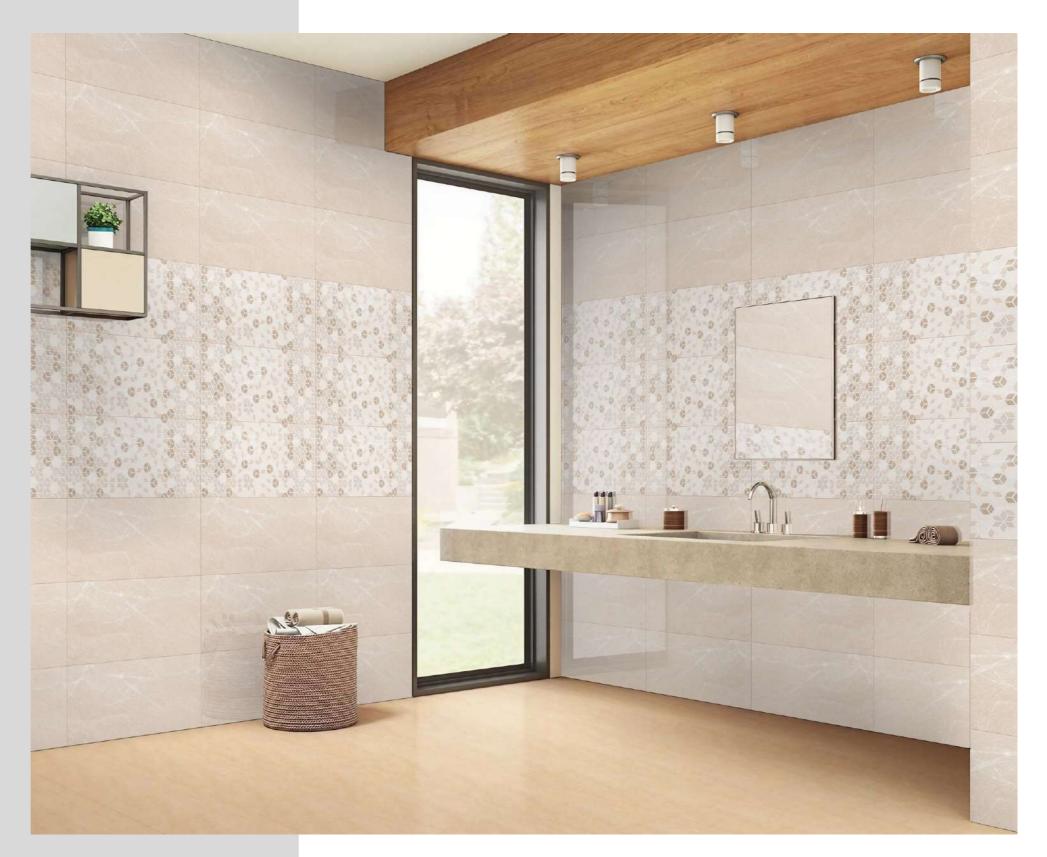




1049 - FL



1049 - HL

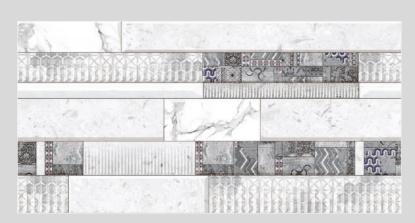

1049 - L

CERAMIC

TILES



300X600MM

300X300MM

FINISH

GLOSSY








FINISH GLOSSY

1127 - L

1127 - HL

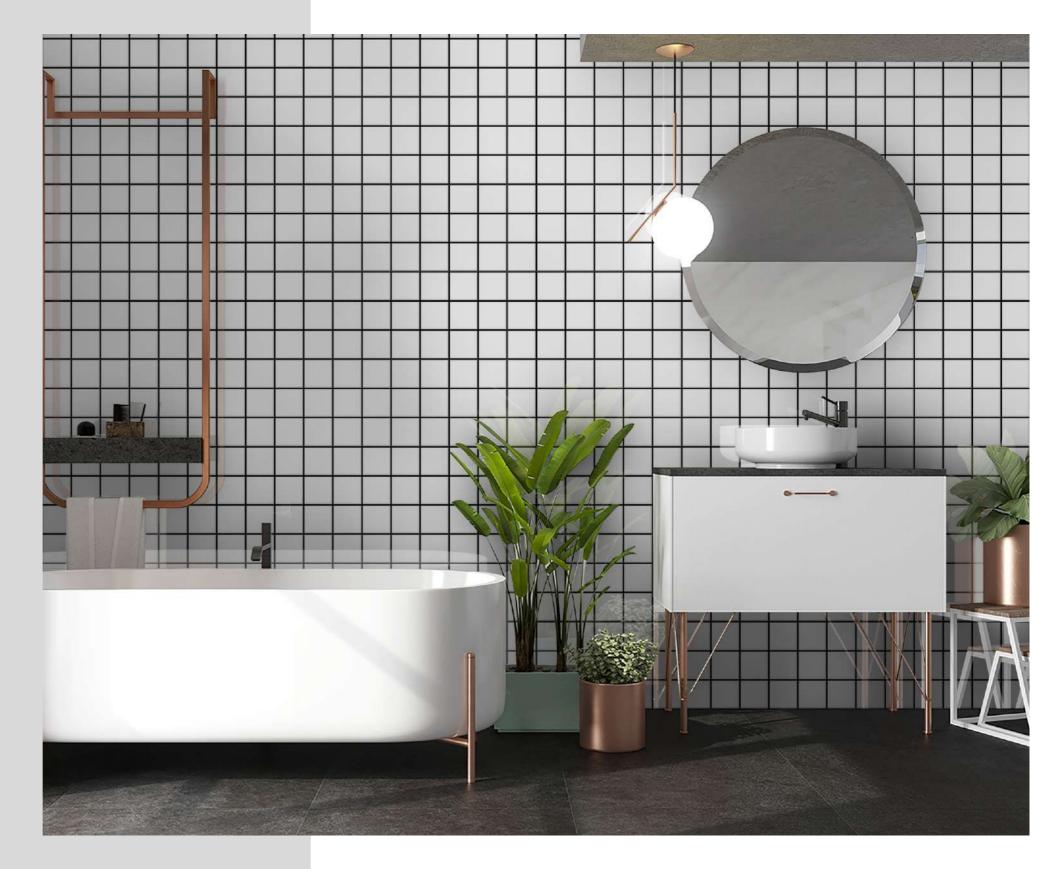





FINISH GLOSSY



C-1034 - L



C-1034 - HL



C-1034 - FL








FINISH GLOSSY




7507 - L



7507 - KT




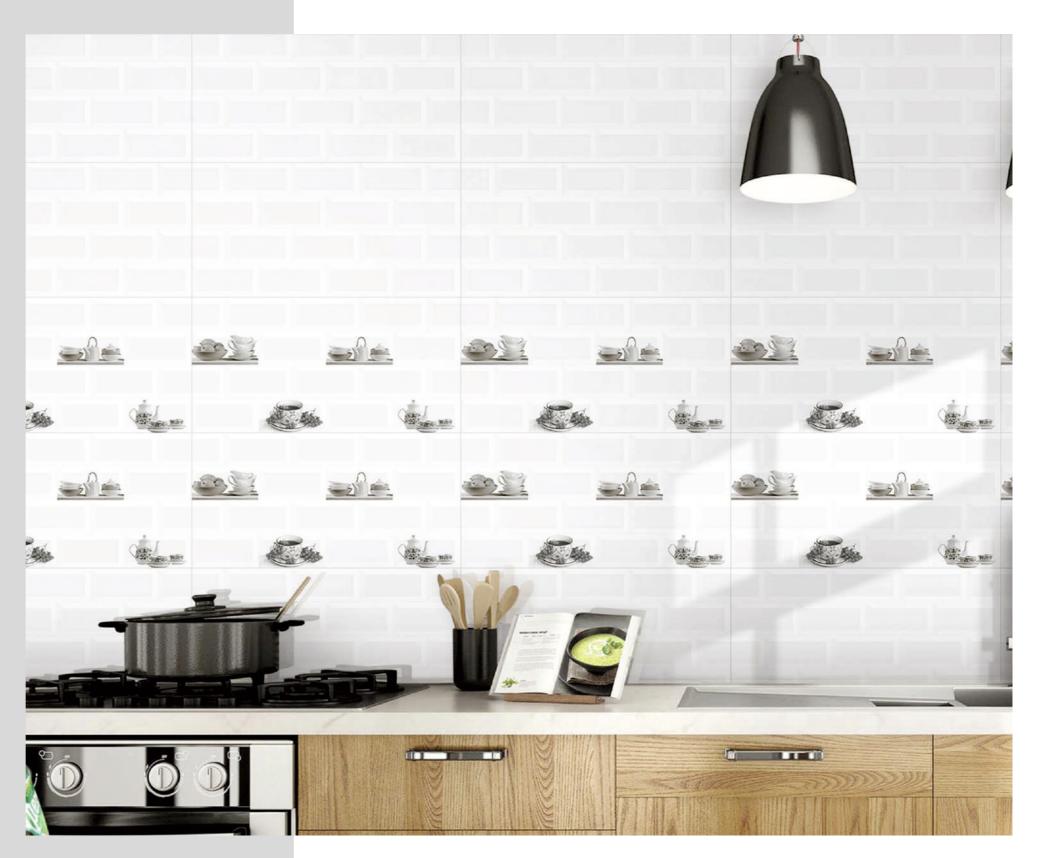





FINISH GLOSSY

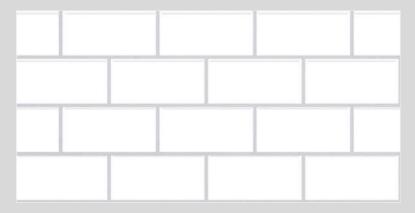


7550








FINISH GLOSSY

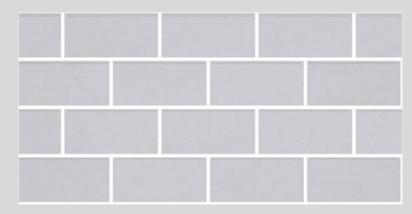

7560

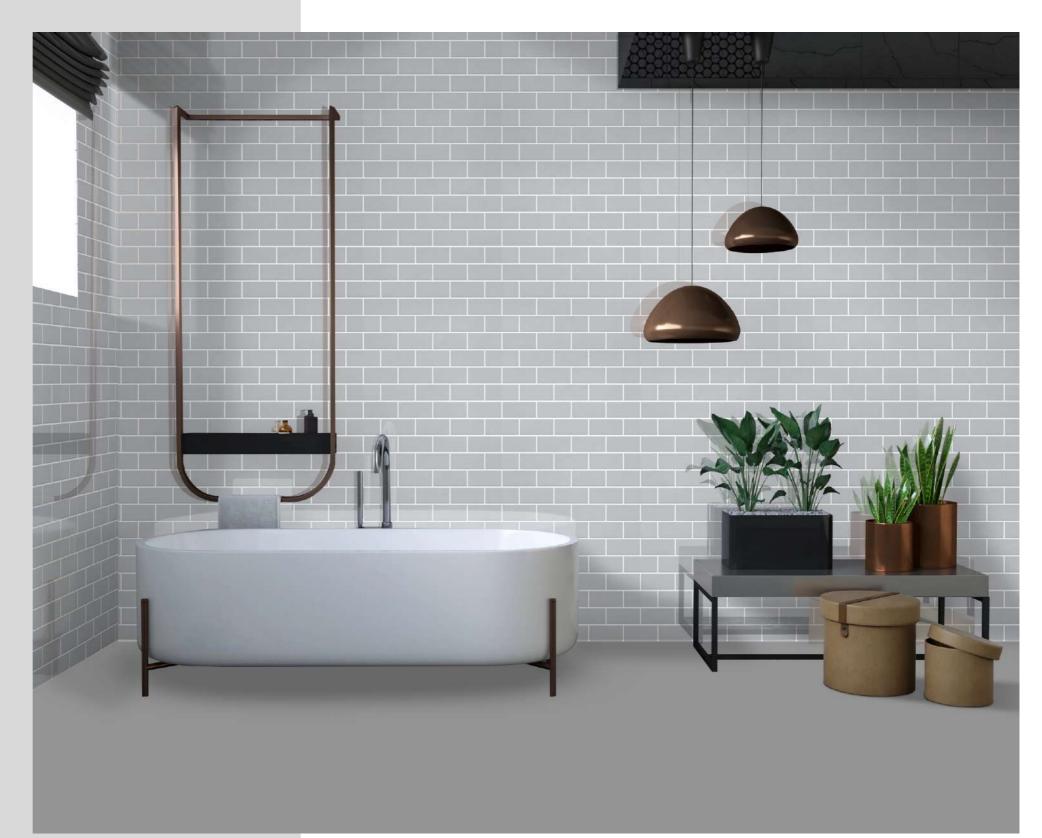





FINISH GLOSSY



7580








FINISH GLOSSY



BLACK

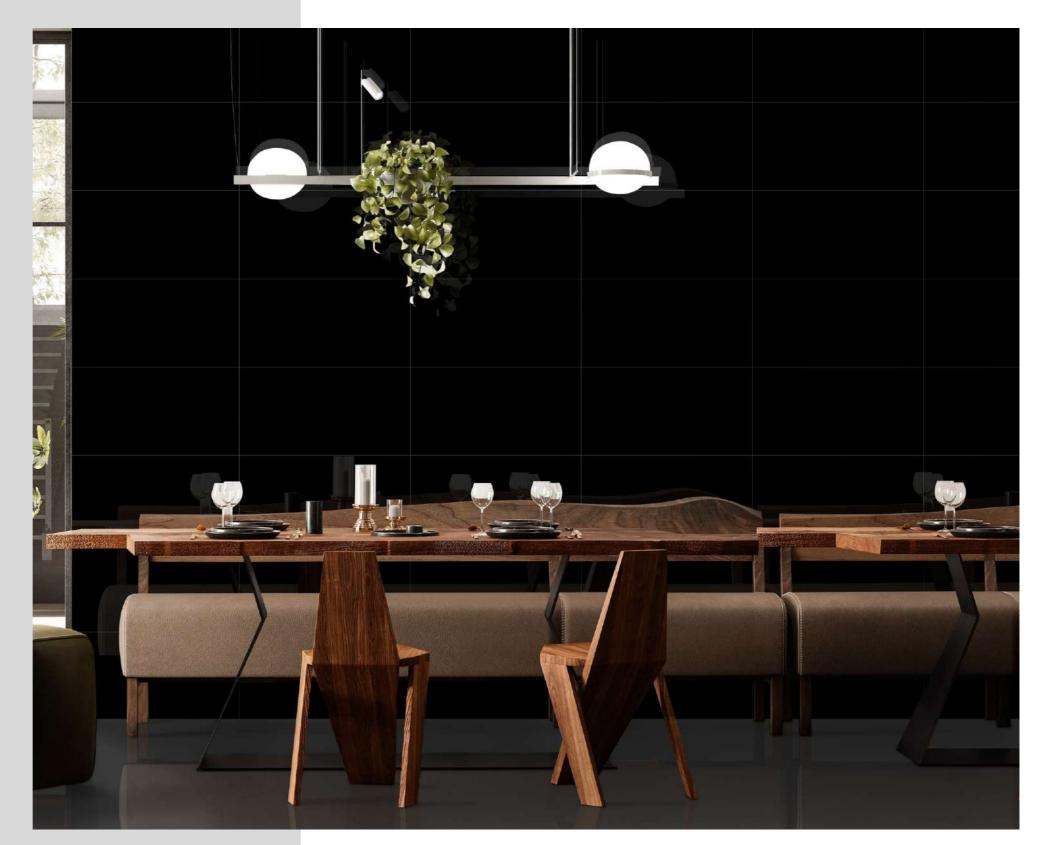





FINISH GLOSSY





WHITE - FL








FINISH MATT



4144 - L

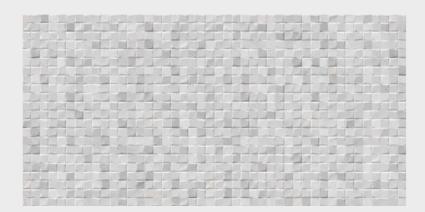

4144 - HL



1 ----








FINISH MATT



9024 - L

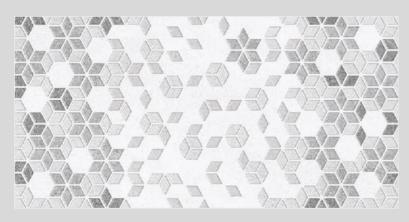

9024 - HL



臣 10







FINISH MATT



9025 - L



9025 - HL














9027 - L



9027 - HL



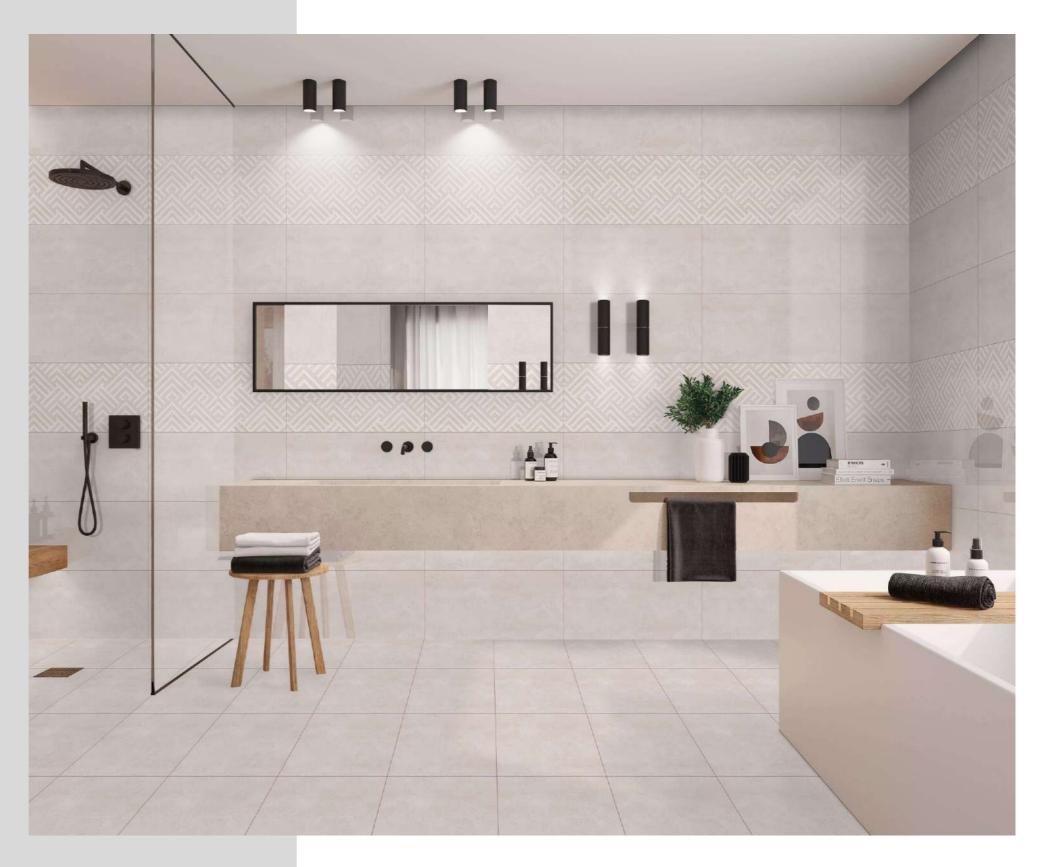





FINISH MATT



9028 - L



9028 - HL



99 pp







FINISH MATT



9219 - L



9219 - HL









FINISH MATT



9245 - L



9245 - HL





9245 - D







FINISH MATT



9246 - L




9246 - HL





9246 - FL

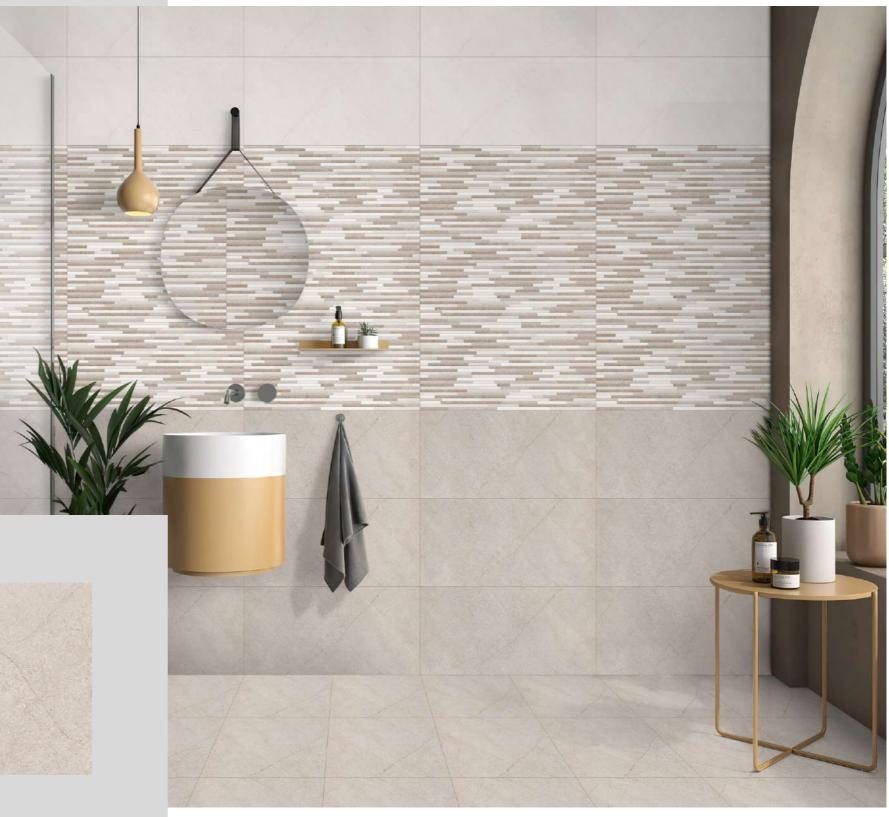





FINISH MATT



9247 - L



9247 - HL









FINISH MATT



9390 - L



9390 - HL









FINISH MATT




BLACK












WHITE - FL

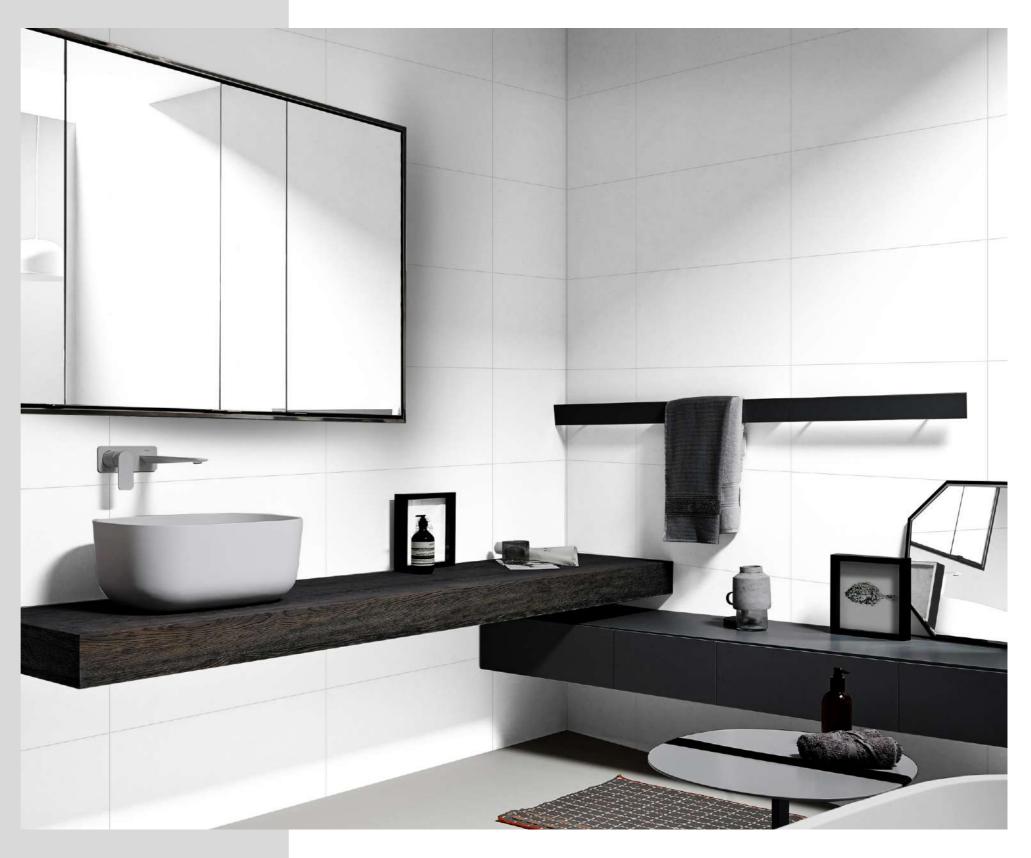





FINISH MATT




9022 - L



9022 - HL




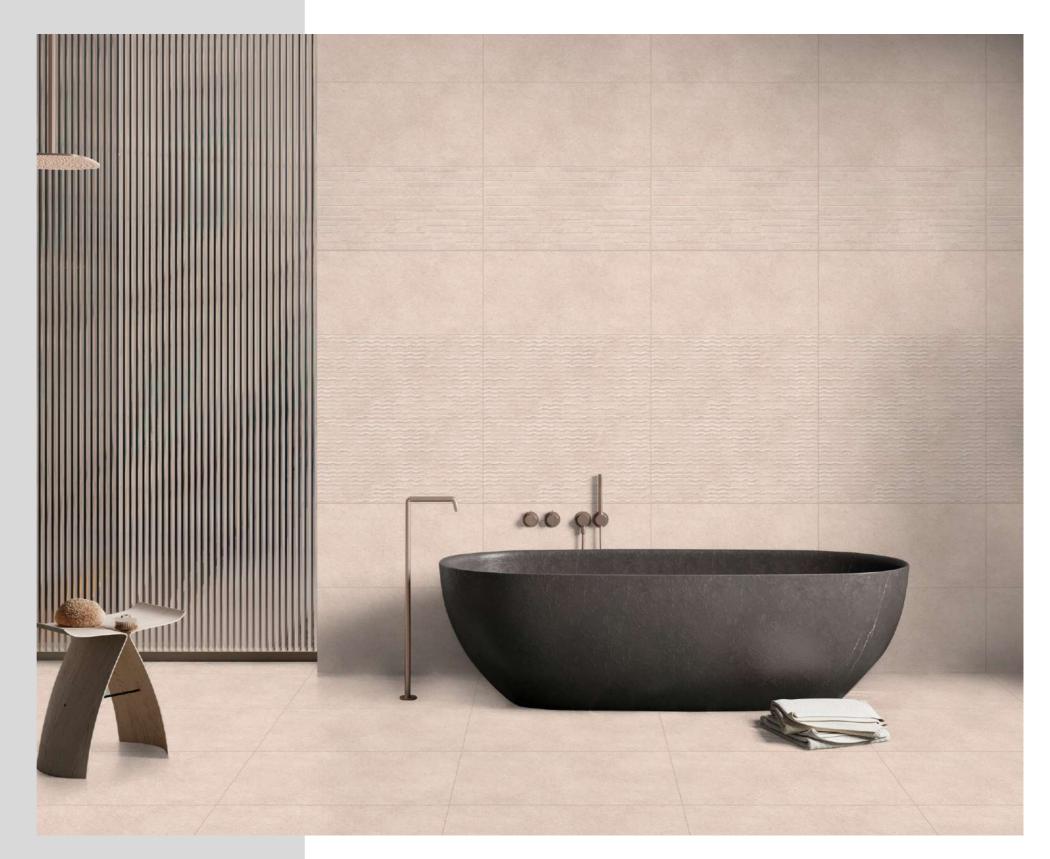






FINISH MATT

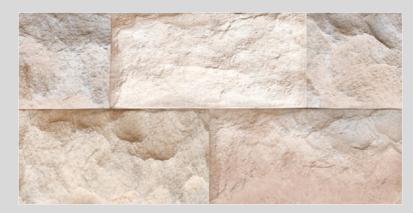

EL - 5061

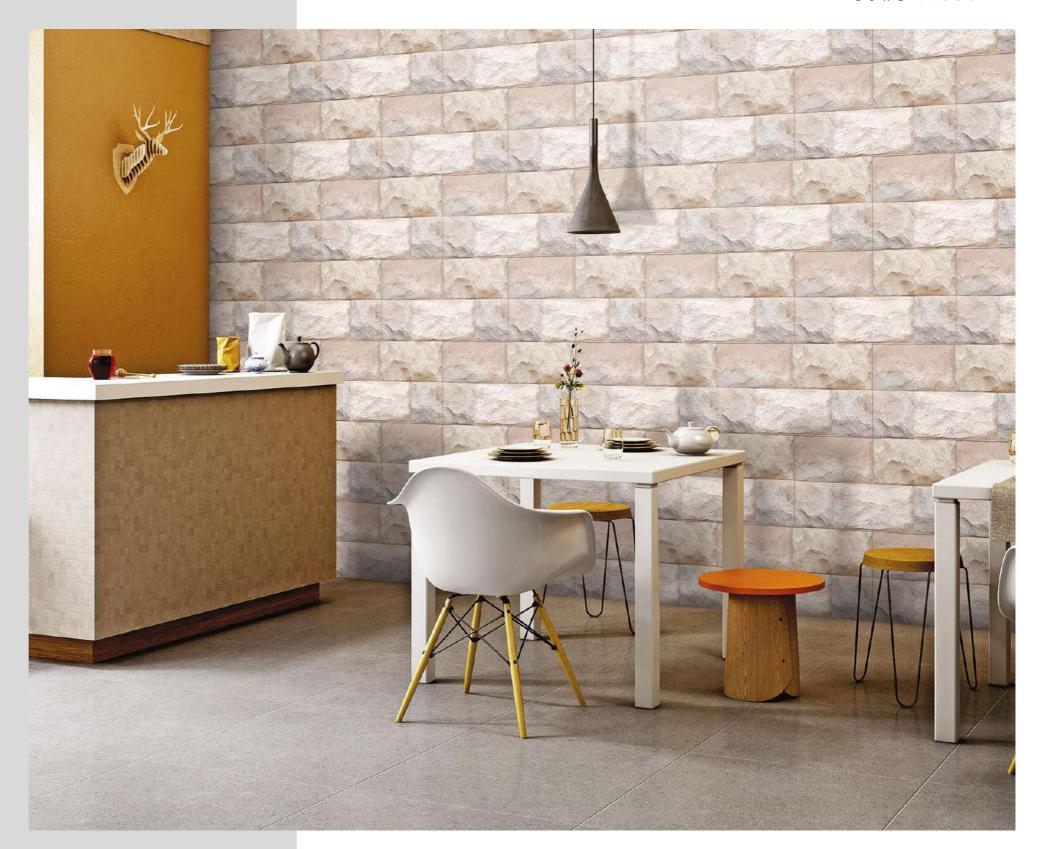






FINISH MATT



EL - 5062

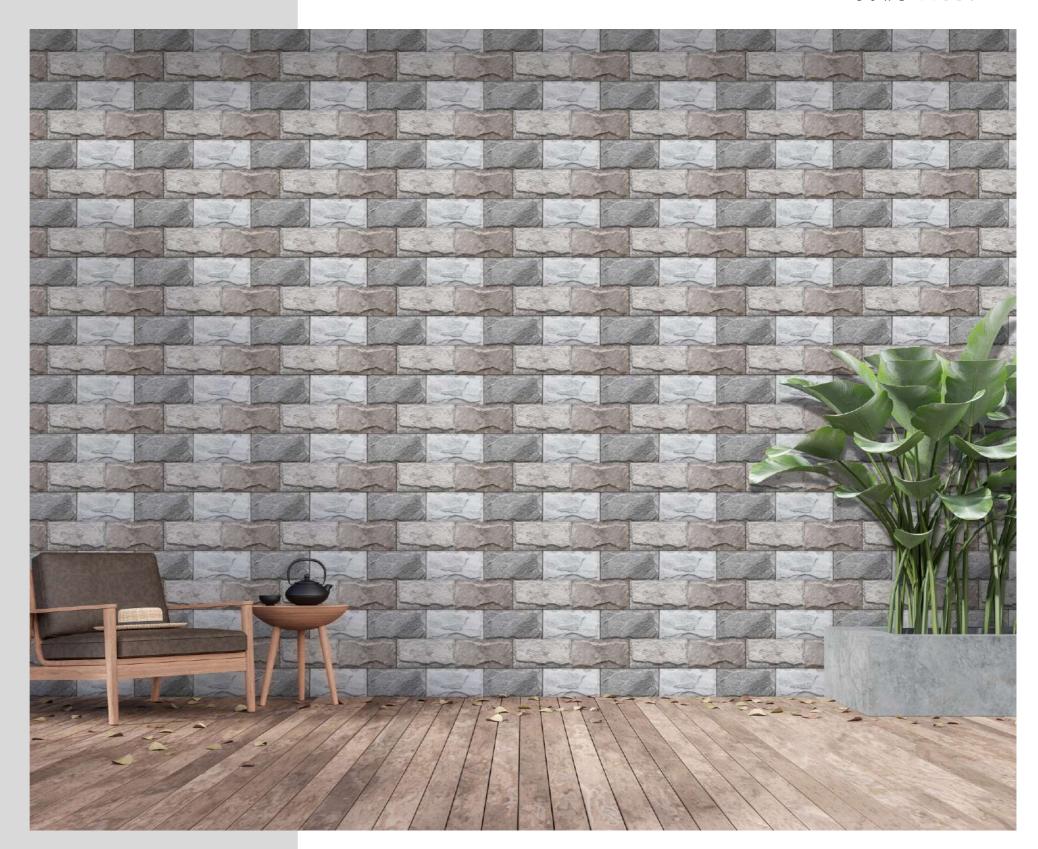






FINISH MATT



TECHNO 1009

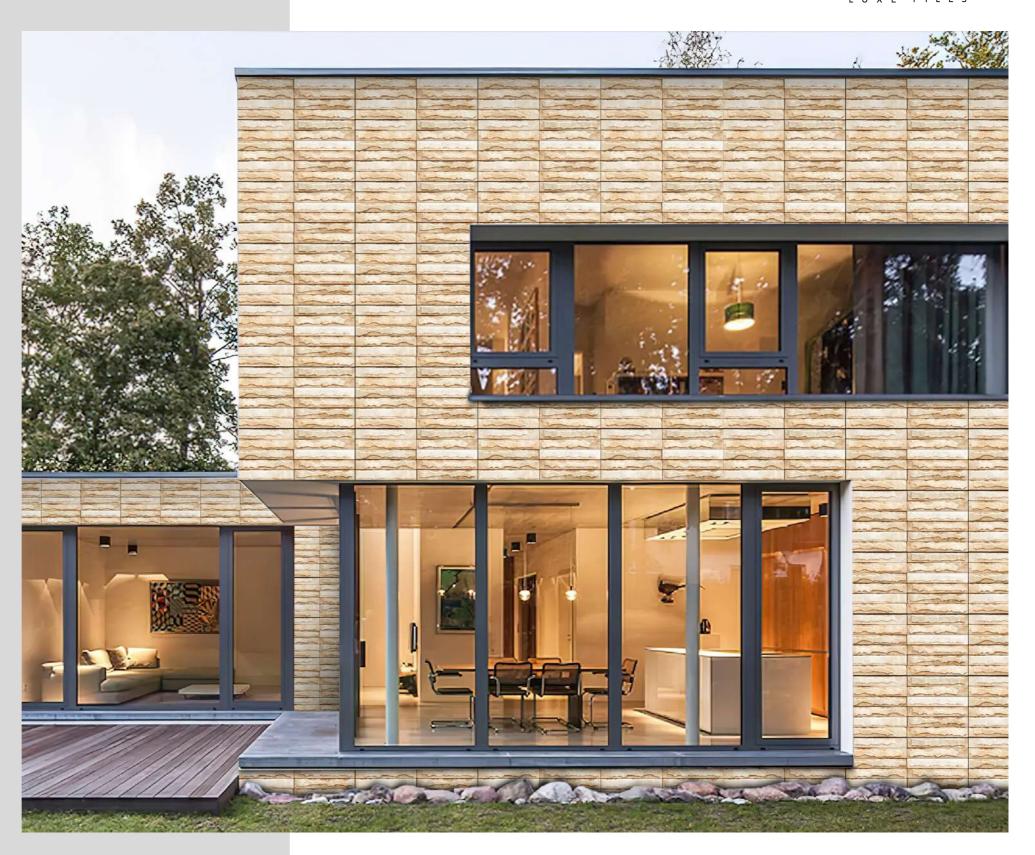





TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/ EN14411 GROUP Bla	CAPRON VITRIFIED TILES VALUE	TEST METHOD
REGULATORY PROPERTIES			
 Deviation In Length & Width Deviation In Thickness Straightness Of Sides Rectangularity Surface Flatness Color Differences J Glossiness 	±0.50% ±5.00% ±0.50% ±0.50% Unaltered As Per Manufacturer	±0.10% ±2.00% ±0.10% ±0.10% ±0.10% No Change Min. 70 %	ISO-10545-2 ISO-10545-2 ISO-10545-2 ISO-10545-2 ISO-10545-2 ISO-10545-16 Glossometer
STRUCTURAL PROPERTIES			
1) Water Absorption 2) Apparent Density	≤0.50% >2.00 gm/cc	≤0.05% >2.28 gm/cc	ISO-10545-3 DIN 51082
MASSIVE MECHANICAL PROPERTIES			
1) Flexural Modulus Of Rupture 2) Flexural Breaking Strength 3) Impact Resistance	Min. 35N/mm² Min. 1300 N As Per Manufacturer	Min. 40N/mm² Min. 2000 N Min. 0.55	ISO-10545-4 ISO-10545-4 ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
1) Deep Abrasion Resistance 2) Moh's Hardness	Max. 175mm ³ Min. 6	Max. 132mm³ 8*	ISO-10545-6 EN101
THERMO HYGROMETRIC PROPERTIES			
 Frost Resistance Thermal Shock Resistance Moisture Expansion Thermal Expansion 	No Damage No Damage Nil Max 9.0x10°	Frost Proof No Damage Nil Max 6.5x10*	ISO-10545-12 ISO-10545-9 ISO-10545-10 ISO-10545-8
CHEMICAL PROPERTIES			
1) Chemical Resistance 2) Stain Resistance	No Damage Resistant	No Damage Resistant	ISO-10545-13 ISO-10545-14
SAFETY PROPERTIES			
1) Slip Resistance(friction Co Efficient)	>0.40	>0.40	ISO-10545-17

PACKING DETAILS

Sr. No.	Size	Thickness (approx.)	Pieces / Box	Area/Box	Wt./Box (approx.)
1	600x1200mm	8.5 mm	2 pcs.	15.50 sq. ft.	28.5-29 kgs.
2	600x600mm	7.9 mm	4 pcs.	15.50 sq. ft.	26.5-27 kgs.